

4K HDR Color Management LUT Box PICS-L

Apply 3D LUT



The main function of PICS-L is to create and apply 3D LUT. PICS-L is a stand-alone converter which supports up/down-conversion between 4K and HD. And the 12G-SDI single link, 3G quad link and HDMI video input can be output to 12G-SDI single link and HDMI. The control is performed by using a PC(control software).

3D LUT Select

3D LUT 1 ~ 10 - For 3D LUT 1-10, you can assign a 3D LUT by importing “.cube” files.


System Control

Back-up - Exporting/Importing setting data to PC available. Allows much easier control of building the systems.


Specifications

PICS - L		
Input	4 x BNC	1 x 12G SDI, 3 x 3G SDI
	1 x HDMI	2.0 HDMI Input
Output	2 x BNC	1 x 12G SDI, 1 x12G SDI Loop Out
	1 x HDMI	2.0 HDMI Output
LAN	1 x LAN in	
USB	1 X USB MEMORY STICK	
POWER	DC 12V	
Dimensions (WxHxD).	(WxHxD) : 110 x 137 x 44mm / 4.33 x 5.93 x 1.73 inch.	
Weight	Weight : Weight : 300g / 0.66 lbs	

Calibration software

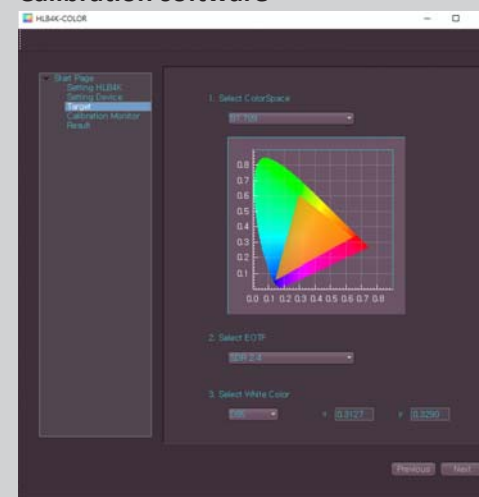

Dimensions

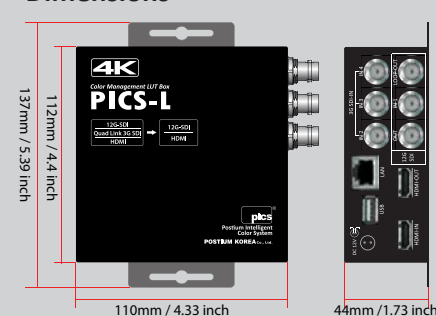

POSTIUM KOREA Co., Ltd.
www.postium.com