

RACK

21.5" Rack Monitor

OBM-R210

3G-SDI x 2 Input & Active Loopout

HDMI / Analog / DVI Input

3D-LUT for Accurate Color Reproduction

HD HDR Support

Color Depth 1.064 Billion Colors

Waveform & Vector Scope

IMD / 16ch Audio Level Meter

System Data Copy & Load

Remote Control via GPI and Network

Panel Resolution 1920 x 1080(21.5"), 1500nit

1500
nit

OB Van 21.5"
Rack Monitors



21.5" Rack Mountable Monitor Optimized design for OB Van

The Postium OBM-R210Q is a 21.5" quad 3G input monitor designed for monitoring up to 4 HD/SD on-screen simultaneously.

The OBM-R210Q accepts up to four independent 1080 60P signals displayed at either a full screen native 1920x1080 resolution or scaled to ¼ resolution via four standard 3G/HD-SDI input interfaces (x4).



POSTIUM KOREA Co., Ltd.
www.postium.com

Product Highlights


- 3G/HD/SD-SDI 2 Channel
- HDR(High Dynamic Range) Display supporting PQ EOTF(ST 2084), Hybrid Log Gamma, S-Log3
- 3D-LUT for Accurate Color Reproduction
- SDR EOTF - BT.1886 (Gamma 2.4)
- 1.064 Billion Colors
- Camera Log Conversion
- Camera Log Mapped SDI Loopout
- Custom 3D LUT File Import Through USB
- Gamma Selection (1.0 ~ 3.0)
- Color Temperature(3200K, 5500K, 6500K, 9300K, USER 1/2/3, D-CINEMA)
- Compare Color Settings (Side by Side)
- Waveform, VectorScope (Wave + Vector, Waveform Wide, Position Change, Size Adjustment)
- Monitor Control via Ethernet, RS-422
- Various Markers (EBU, 4:3, 16:9, 1.85:1, 2.35:1, Variable etc.)
- Internal Patterns Display for Color Test (Black ~ 100% White, Color Bar)
- Time Code Display (Position / Size Selection)
- Easy Firmware Update by USB
- HDR & Camera Log Comparison
- Fast Mode
- Focus Assist
- HDR Waveform
- Zero Scan / 1:1 Scan
- H/V Delay
- Blue/Mono Only
- IMD
- De-embedded 8~16ch Audio Level Meter
- Remote Control via GPI(RJ-45) Port
- Gamut Error
- False Color(Zebra, Color Pattern, ARRI)
- 3 Color TALLY Lamp
- Rack & VESA Mount (Option)
- Closed Caption(608, 708)
- System Data Copy
- Key Lock & Password Lock
- Aspect
- Freeze

Parts and Controls



* Functions are subject to change without prior notice for the product quality improvement.

Rack Mountable without Additional Accessories
Easy for Installing in the Rack
Convenient for Cabling

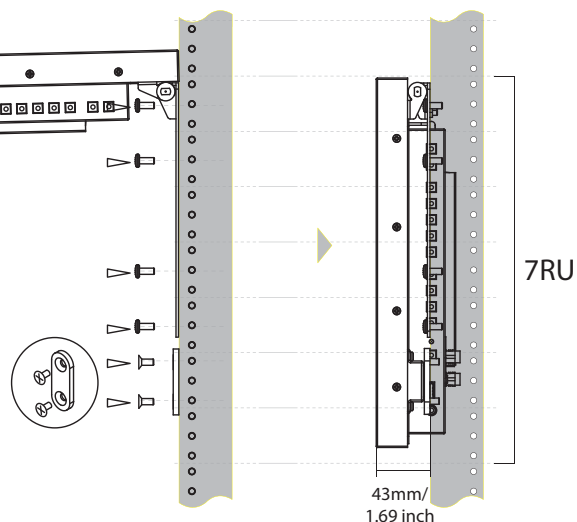


Specifications

ITEM	OBM-R210Q	
Input	BNC (SDI)	4 x 3G/HD/SD-SDI
	HDMI	1 x HDMI 2.0
Output	BNC (SDI)	4 x 3G/HD/SD-SDI
Input Signal Format	SMPTE ST 425-AB	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF) / 1080i (60/59.94/50)
	SMPTE ST 274	1080p(30/29.97/25/24/23.98/24sF/23.98sF) 1080i (60/59.94/50)
	SMPTE ST 296	720p(60/59.94/50)
	SMPTE ST 260	1920 x 1035i(60/59.94)
	SMPTE ST 2048	2048 x 1080p(24/23.98/24sF/23.98sF)
	SMPTE ST 125	480i(59.94)
	ITU-R BT.656	576i(50)
	HDMI	~ 2160p(60)
	DVI-D	VESA/IBM Modes
Audio In/Out	1 x Phone Jack In	Line In(Stereo)
	1 x Phone Jack Out	H/P Out(Front, Stereo)
	2 x Speaker Out	Stereo
Display	Size	21.5" LCD
	Resolution	1920 x 1080 (16:9)
	Pixel Pitch	0.270mm x 0.270mm
	Color	True 16.7M Colors
	Viewing Angle	178(H), 178(V)
	Luminance of White	1500cd/m ²
	Contrast	1000 : 1
	Display Area (H x V)	476.064 (H)mm x 267.786 (V) mm
General	1 x Ethernet	-
	1 x GPIO	GPI-7 Port, RJ-45P Jack
	2 x Serial	RS-422 Jack, RJ-45P Input / Output
	1 x USB	For Firmware Update, Color Calibration
	Power Requirements	DC24V
	Power Consumption	Max 40W
	Operating Temperature	0 ~ 40°C(32°F~104°F)
	Operating Humidity	20 ~ 80% RH
	Weight	5kg / 11.02 lb
	Dimensions(main body)	505.5 x 297.2 x 67.4 mm / 19.88 x 11.69 x 2.65 inch
	Accessories	DC Adapter / Power Cable

* Specifications are subject to change without prior notice for the product quality improvement.

Dimensions(mm)

Dimensions -- 505.5 x 297.2 x 67.4 mm / 19.88 x 11.69 x 2.65 inch Weight -- 5kg / 11lbs

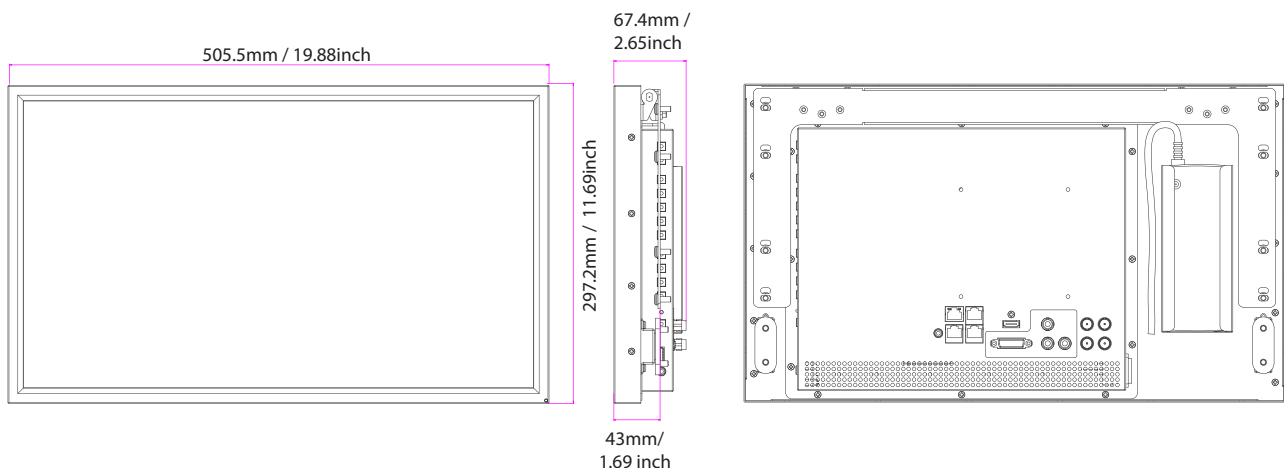

* Specifications are subject to change without prior notice for the product quality improvement.